

# LOG CABIN WALL HANGING

Finishes to 28½" × 28½"

## PLEASE NOTE

All seam allowances are ¼" WOF = Width of Fabric

## REQUIRED MATERIALS

- 2½" × 14" **Center Square** (includes **center cornerstone**)
- 3½" × 21" **Round 1 Light**
- 5¼" × WOF **Round 2 Light** (includes **sashing**)
- 3½" × WOF **Round 3 Light**
- 3½" × WOF **Round 4 Light**
- 3½" × WOF **Round 1 Dark**
- 3½" × WOF **Round 2 Dark**
- 3½" × WOF **Round 3 Dark**
- 5¼" × WOF **Round 4 Dark**
- 8" × WOF for **inner borders**
- ⅓ yard for **outer borders**
- 10" × WOF for **binding**
- 1 yard for **backing**
- Creative Grids 10" Log Cabin Trim Tool Duo  
#CGRJAW10

## RECOMMENDED PRODUCTS

- Olfa Rotary Cutter
- Olfa Spinning Rotary Mat 12" × 12"

## MAKE LOG CABIN BLOCKS

Follow the instruction pamphlet that comes with the 10" Log Cabin Trim Tool Duo to make (4) Log Cabin Blocks.

Each block should measure 10½" × 10½".

**PLEASE NOTE:** If you are confident with your ¼" seam allowance, and prefer to cut your log cabin "logs" to the exact length instead of cutting them longer and trimming, refer to the "Sewing and Trimming Sequence" download available on the Creative Grids website (*or click the link, right*).

## CUT FABRICS FOR FINISHING


From **Center Square** fabric, cut:

- (1) 1½" × 1½" square for **center cornerstone**

From **Round 2 Light**, cut:

- (4) 1½" × 10½" strips for **sashing**

*(Continued on next page...)*

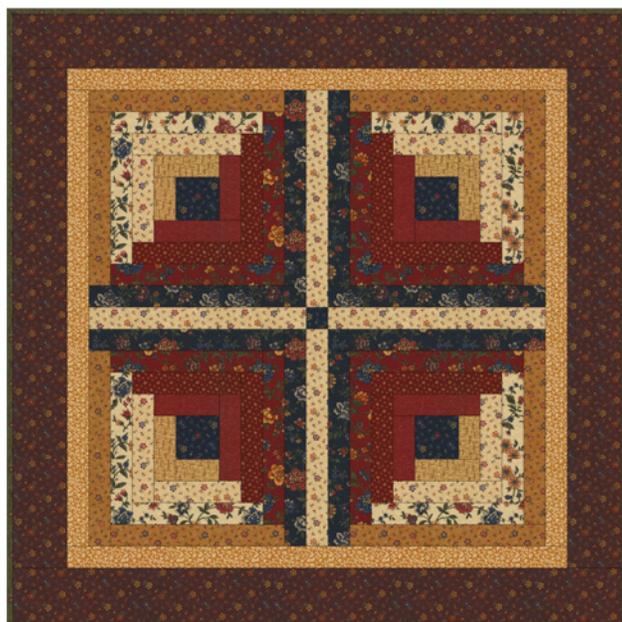

Follow along with the  
HOW TO USE THE CREATIVE GRIDS  
10" LOG CABIN  
TRIM TOOL DUO  
video featured on our YouTube channel:



[YouTube.com/Shabby Fabrics](https://www.youtube.com/ShabbyFabrics)

Download Creative Grid's  
**Sewing and Trimming  
Sequence**

[CLICK HERE >](#)

Or go to:  
[creativegridsusa.com/products/CGRJAW10](https://www.creativegridsusa.com/products/CGRJAW10)  
and click the "Instructions" button.

From **inner border** fabric, cut:

- (4) 1½" × WOF strips for **inner borders**

From **outer border** fabric, cut:

- (4) 3" × WOF strips for **outer borders**

From **binding** fabric, cut:

- (4) 2½" × WOF strips for **binding**

## ASSEMBLE WALL HANGING

Arrange blocks, referring to sample image for placement and orientation.

Sew blocks and **sashing** strips together in rows. Press toward sashing.

Sew a sashing strip to each side of the **center cornerstone**. Press toward sashing. This is your horizontal sashing unit.

Join Row 1, horizontal sashing unit, and Row 2, pressing seams open.


*For remaining steps, press all seams to the outer border of the wall hanging.*

Sew **inner border** strips to the left and right sides of the wall hanging, and trim to be even with the wall hanging.

Sew inner border strips to the top and bottom of the wall hanging, and trim to be even with the wall hanging.

Sew **outer border** strips to the left and right sides of the wall hanging, and trim to be even with the wall hanging.

Sew outer border strips to the top and bottom of the wall hanging, and trim to be even with the wall hanging.

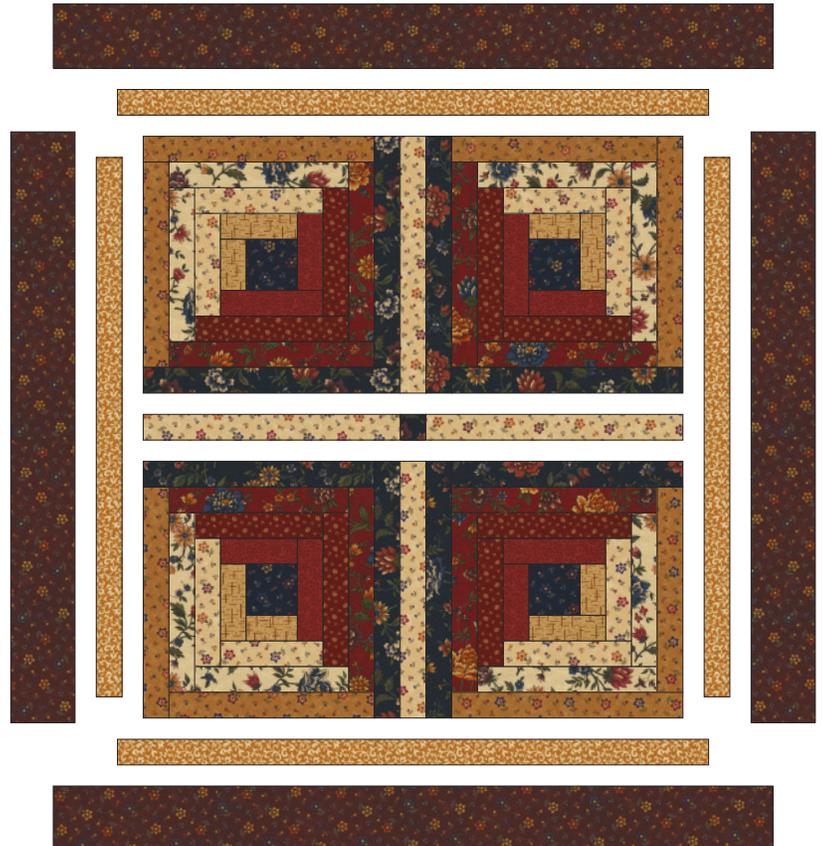

## FINISH WALL HANGING

Layer wall hanging top, batting, and backing. Quilt as desired.

Sew **binding** together into one long strip. Fold binding in half lengthwise with wrong sides together and press. Sew the binding to the front side of the wall hanging starting at any side. Turn the binding over and hand stitch to the back of the wall hanging.

## KITS

featuring  
fabrics as seen in the video  
are available at  
ShabbyFabrics.com  
*while supplies last!*